

Water Baths

GFL®



■ Convincing quality features stand for a practice-proven range of 13 special Water Baths that guarantee reliable temperature examinations, independent of their field of application.



Quality built on Tradition

Users in research labs, standard and special labs for medicine, science and industry throughout the world have been profiting from the precision and dependability of our products for more than 40 years, all of which comply with valid European standards and bear the CE mark.

In the future, the success of a product spectrum of laboratory devices that meet the toughest demands on material, functioning and design will continue to be ensured by experience of every-day use in detail, ongoing technical advances and an excellent quality approach.

The phrase „Quality built on Tradition“ encompasses more than just the sum of impressive product innovations. It is also an expression of our corporate policy, which includes a high degree of ready-and-waiting service as our primary customer-friendly service goal.

This applies to all of the GFL laboratory products that are produced exclusively at our plant in Germany - Deep Freezers, Shakers, Shaking Water Baths, Water Stills, Incubators or Water Baths alike.



Secure future

A vested quality demand in accordance with international standards is documented for all GFL laboratory products with the certification to DIN EN ISO 9001:2008, promoting more trust in the permanent high quality level of our products.

In addition to the continuous optimisation of ongoing production processes, the ISO obligation also calls for the commitment to quality awareness of our employees and the continuous development and rapid implementation of preventive measures to ensure quality assurance at a high level.

Valued as universal laboratory aids



In daily practice, GFL Water Baths have been valued for decades as a robust and universal aid for reliable temperature examinations in laboratories. They prove themselves daily in various fields of application – no matter whether they are used as

Incubation or Inactivation WaterBaths, as Steam Baths, as Water Baths for fume hoods, Multiple Water Baths or as a Tissue Float Bath. All GFL Water Baths are tested according to the German Equipment Safety Law and have the CE mark.

The accessories shown in this brochure are not included in the standard scope of supply of the units. The right of constructional modifications remains reserved. Special makes are available.

Contents

| Product-No. | | Page | Accessories / Page |
|----------------------|---|------|--------------------|
| 1002 to 1008 | Incubation/Inactivation Baths | 4/5 | 6/7 |
| 1012 and 1013 | Incubation/Inactivation Baths with circulation system | 4/5 | 7 |
| 1023 | Steam Bath | 8 | 8 |
| 1031 and 1032 | Water Baths for fume hoods | 9 | – |
| 1041 and 1042 | Multiple Water Baths | 10 | – |
| 1052 | Tissue Float Bath | 11 | 11 |

1002 - 1008

Successfully used

The range of Incubation and Inactivation Baths comprises seven models with five different sizes of 7 to 40 l capacity.

Water Bath 1005 is especially suitable for warming medical hot packs.

Water Baths 1012 and 1013 are equipped with a circulation system, thus guaranteeing an optimal temperature uniformity.

Specifications and features

- ▶ Short heating-up times.
- ▶ Temperature display and setting digitally via LED display, in 0.1 °C increments. Fast and exact setting, exact reproducibility of the set value.
- ▶ Electronic monitoring of the temperature regulator. In case of failure, the cause of the fault is shown on the display.
- ▶ Soft-touch keys with clear symbols. Two-finger operation prevents unintentional alterations of the set value.
- ▶ Interior (bath interior and heating element, cover frame, lid and perforated floor) made of stainless steel. Standard equipment: lid and perforated floor. Water Bath 1005 is supplied without perforated floor if the rack for hot packs 1923 (accessory) is ordered.



1005 Water Bath, 40 litres



1003 Water Bath, 14 litres

Technical data

| Model Order No. | Interior dimensions | | | Exterior dimensions | | | Capacity approx. litres | Electrical connection* | Weight approx. | | Packing volume approx m ³ |
|-----------------|---------------------|----------|---------------------|---------------------|----------|-----------|-------------------------|-----------------------------|----------------|----------|--------------------------------------|
| | Width mm | Depth mm | Working height † mm | Width mm | Depth mm | Height mm | | | net kg | gross kg | |
| 1002 | 245 | 200 | 145 | 330 | 395 | 255 | 7 | 230 V / 50...60 Hz / 1.0 kW | 9 | 11 | 0.11 |
| 1003 | 400 | 245 | 145 | 485 | 440 | 255 | 14 | 230 V / 50...60 Hz / 1.5 kW | 12 | 15 | 0.13 |
| 1004 | 600 | 245 | 145 | 685 | 440 | 255 | 21 | 230 V / 50...60 Hz / 1.5 kW | 17 | 21 | 0.26 |
| 1005 | 410 | 296 | 315 | 495 | 490 | 445 | 40 | 230 V / 50...60 Hz / 1.5 kW | 21 | 27 | 0.30 |
| 1008 | 400 | 245 | 205 | 485 | 440 | 325 | 20 | 230 V / 50...60 Hz / 1.5 kW | 14 | 17 | 0.13 |

† perforated floor to upper rim

* Other voltages available on request

1012 / 1013




- ▶ Cover frame and lid have mirror finish. Lift-up, insulating lid with inner camber, no dripping back of condensate into the tubes.
- ▶ Corrosion-resistant outer housing, made of electrolytically galvanised sheet steel, powder-coated. Drain cock at the back.

Applications

All Water Baths models 1002 to 1013 are successfully used for incubations and inactivations of cultures, such as e.g. for warming bacteriological media, carrying out chemical reactions or thawing samples.

The circulation system of Water Baths 1012 and 1013 ensures optimum temperature uniformity throughout the whole bath. An electric motor with rotary magnet is flanged to the bath floor. Its torque is transmitted to a PTFE coated stirring magnet in the bath. The stirring magnet forces the water into the centre of the bath and then evenly back again.

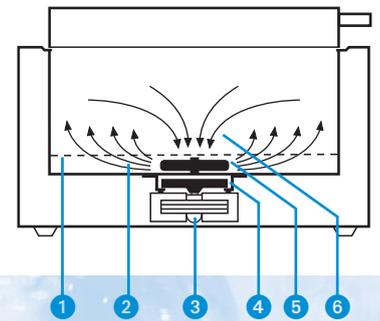

- 1 Perforated floor
- 2 Water circulation
- 3 Motor
- 4 Rotary magnet
- 5 Stirring magnet
- 6 Water circulation



1013 Water Bath with circulation system, 14 litres

Additional technical data of models 1002 - 1013

| | |
|----------------------------------|---|
| Temperature regulation: | Microprocessor-controlled |
| Temperature constancy: | ±0.1 °C temporal |
| Temperature range: | approx. 5 °C above ambient temperature to +99.9 °C |
| with water level regulator 1919: | approx. 3 °C above tap water temperature to +99.9 °C |
| Over-temperature cut-out: | electronic, 4 °C above set temperature and electro-mechanical >130 °C |

Technical data

| Model Order No. | Interior dimensions | | | Exterior dimensions | | | Capacity approx. litres | Electrical connection* | Weight approx. | | Packing volume approx m ³ |
|-----------------|---------------------|----------|--------------------------------|---------------------|----------|-----------|-------------------------|-----------------------------|----------------|----------|--------------------------------------|
| | Width mm | Depth mm | Working height [◆] mm | Width mm | Depth mm | Height mm | | | net kg | gross kg | |
| 1012 | 245 | 200 | 145 | 330 | 395 | 325 | 7 | 230 V / 50...60 Hz / 1.0 kW | 10 | 12 | 0.11 |
| 1013 | 400 | 245 | 145 | 485 | 440 | 325 | 14 | 230 V / 50...60 Hz / 1.5 kW | 14 | 17 | 0.13 |

◆ perforated floor to upper rim

* Other voltages available on request

Accessories



1002-1008



Test Tube Rack
made of stainless steel,
with 20 openings of 18 mm Ø,
for test tubes of 16/17 mm Ø,
max. height 185 mm

Order No. 1920

Capacities:

| | | |
|------------------------|------------|----------------|
| Water Bath 1002 | 4 racks = | 80 test tubes |
| Water Bath 1003 / 1008 | 8 racks = | 160 test tubes |
| Water Bath 1004 | 12 racks = | 240 test tubes |
| Water Bath 1005 | 9 racks = | 180 test tubes |




Test Tube Rack
made of stainless steel,
with 5 openings of 31 mm Ø,
max. height 185 mm

Order No. 1921

Capacities:

| | | |
|------------------------|------------|---------------|
| Water Bath 1002 | 4 racks = | 20 test tubes |
| Water Bath 1003 / 1008 | 8 racks = | 40 test tubes |
| Water Bath 1004 | 12 racks = | 60 test tubes |
| Water Bath 1005 | 9 racks = | 45 test tubes |

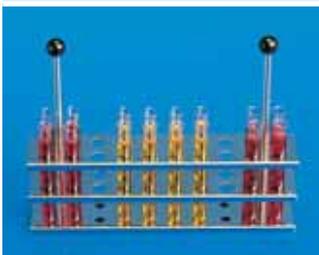

Test Tube Rack
made of stainless steel,
with 20 openings of 13 mm Ø,
for test tubes of 12 mm Ø,
max. height 185 mm

Order No. 1922

Capacities:

| | | |
|------------------------|------------|----------------|
| Water Bath 1002 | 4 racks = | 80 test tubes |
| Water Bath 1003 / 1008 | 8 racks = | 160 test tubes |
| Water Bath 1004 | 12 racks = | 240 test tubes |
| Water Bath 1005 | 9 racks = | 180 test tubes |



Milk Bottle Rack
made of stainless steel,
with 12 openings of 56 mm Ø,
for baby milk bottles

Order No. 1942

Capacities:

| | | |
|------------------------|-----------|------------|
| Water Bath 1002 | 1 rack = | 12 bottles |
| Water Bath 1003 / 1008 | 2 racks = | 24 bottles |
| Water Bath 1004 | 3 racks = | 36 bottles |
| Water Bath 1005 | 2 racks = | 24 bottles |



**Adjustable
Water Level Regulator**
to keep the water level constant
and to cool Water Baths 1002-
1008 (approx. 3 °C above tap
water temperature)

Order No. 1919



1005



Rack for Water Bath 1005
made of stainless steel,
especially suitable for warming
medical hot packs.

Order No. 1923

Capacities:

| | |
|-----------------|-------------------|
| Water Bath 1005 | up to 8 hot packs |
|-----------------|-------------------|



1012/1013



Test Tube Rack
made of stainless steel,
with 20 openings of 18 mm Ø,
for test tubes of 16/17 mm Ø,
max. height 185 mm

Order No. 1920

Capacities:

Water Bath 1012 4 racks = 80 test tubes
Water Bath 1013 8 racks = 160 test tubes




Test Tube Rack
made of stainless steel,
with 5 openings of 31 mm Ø,
max. height 185 mm

Order No. 1921

Capacities:

Water Bath 1012 4 racks = 20 test tubes
Water Bath 1013 8 racks = 40 test tubes

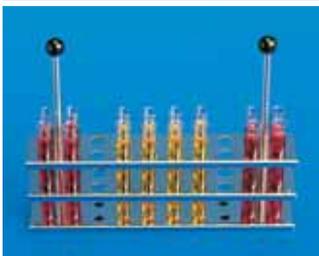

Test Tube Rack
made of stainless steel,
with 20 openings of 13 mm Ø,
for test tubes of 12 mm Ø,
max. height 185 mm

Order No. 1922

Capacities:

Water Bath 1012 4 racks = 80 test tubes
Water Bath 1013 8 racks = 160 test tubes



Milk Bottle Rack
made of stainless steel,
with 12 openings of 56 mm Ø,
for baby milk bottles

Order No. 1942

Capacities:

Water Bath 1012 1 rack = 12 bottles
Water Bath 1013 2 racks = 24 bottles



**Adjustable
Water Level Regulator**
to keep the water level constant
and to cool Water Baths 1012-
1013 (approx. 3 °C above tap
water temperature)

Order No. 1919

1002-1013



Water Bath Protection Agent
ProAquaTop prevents the forma-
tion of algae, bacteria and
mould. Biodegradable and non-
toxic.

Highly efficient: only 1 ml per litre of water. A necessary change of
water is indicated by fading of the blue colouration

Order No. 1910

Packing unit 1 bottle / Contents 200 ml.

Order No. 1911

Packing unit 3 bottles / Contents 3 x 200 ml

Order No. 1912

Packing unit 6 bottles / Contents 6 x 200 ml



Lid with openings
made of stainless steel, with sets
of rings made of heat-resistant
plastic material. Number and
diameter of openings can be
chosen between 52 and 192
mm, in steps of 20 mm.

Example

Price available on request

please state number and
diameter of openings

Increases the variability of the
Water Bath and reduces the loss
of heat when placing large
vessels into the Bath

1023

Indispensable


For gentle steaming work with Erlenmeyer flasks, glasses, etc., GFL Water Baths models Steam Bath 1023 and Water Baths for fume hoods 1031 and 1032 have become indispensable in daily practice.

Accessories



Test Tube Rack
made of stainless steel,
with 100 openings of Ø 18 mm,
for test tubes

Order No. 1933

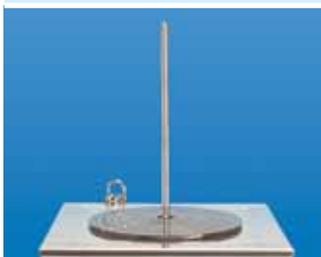

Support Rod
made of stainless steel,
length 316 mm, Ø 12 mm

Order No. 1985

GFL Water Baths convince through their varied ranges of application. For instance, the Steam Bath's square cover frame (W 265 mm x L 265 mm) is removable. Its 9-part set of rings, made of heat-resistant plastic material can be parted. Its diameter can be varied in approx. 20 mm steps (min. 32.5 / max. 173.5 mm).

1023 Steam Bath, 7 litres



Technical data

| Model Order No. | Interior dimensions | | | Exterior dimensions | | | Capacity approx. litres | Electrical connection* | Weight approx. | | Packing volume approx m ³ |
|-----------------------|---------------------|-------------|----------------------|---------------------|-------------|--------------|-------------------------------|-----------------------------|----------------|-------------|--|
| | Width mm | Depth mm | Working height mm | Width mm | Depth mm | Height mm | | | net kg | gross kg | |
| 1023 | 240 | 240 | 120 | 342 | 400 | 180 | 7 | 230 V / 50...60 Hz / 1.0 kW | 9 | 12 | 0.10 |

◆ perforated floor to upper rim

* Other voltages available on request

1031 / 1032

Applications

Water Baths for fume hoods 1031 / 1032 are special baths that are preferably used for protected applications in fume hoods (digestories).

Specifications and features

- ▶ Temperature range from approx. 5°C above ambient to boiling point, temperature regulation through tension thermostat. Heating element protected by over-temperature cut-out.
- ▶ 1023: bath, cover frame and perforated floor above the heating element are made of stainless steel.
- ▶ 1023: the adjustable water level regulator is situated at the back of the unit. It is part of the standard scope of supply, as well as the set of rings made of heat-resistant plastic material.
- ▶ 1023: outer housing made of electrolytically galvanised sheet steel, powder-coated.
- ▶ 1031/1032: bath, removable recessed lid with holes and perforated floor above the heating element are made of stainless steel.
- ▶ 1031/1032: the adjustable water level regulator at the right-hand side of the unit is part of the standard scope of supply.
- ▶ 1031/1032: the openings in the lid are covered by sets of rings made of heat-resistant plastic material.
- ▶ 1031/1032: four non-slip plastic feet ensure great stability.



1031 Water Bath for fume hoods

1032 Water Bath for fume hoods

Technical data

| Model Order No. | Openings with sets of rings | Ø of the openings mm | Working height ♦ mm | Exterior dimensions | | | Electrical connection* | Weight approx. | | Packing volume approx. m ³ |
|-----------------|-----------------------------|----------------------|---------------------|---------------------|----------|-----------|-----------------------------|----------------|----------|---------------------------------------|
| | | | | Width mm | Depth mm | Height mm | | net kg | gross kg | |
| 1031 | 6 | 91 | 100 | 430 | 300 | 155 | 230 V / 50...60 Hz / 1.5 kW | 6.1 | 7.4 | 0.05 |
| 1032 | 8 | 111 | 100 | 670 | 300 | 155 | 230 V / 50...60 Hz / 1.5 kW | 8.2 | 10.2 | 0.24 |

♦ perforated floor to upper rim

* Other voltages available on request

1041/1042

Especially suitable

GFL Multiple Water Baths 1041 / 1042 are especially suitable for gentle steaming work with columns, Erlenmeyer flasks or beakers. Even after years of continuous operation they remain to be the most reliable laboratory aids.

Specifications and features

- ▶ Temperature range from approx. 5 °C above ambient to boiling point, temperature regulation through tension thermostat. Heating element protected by over-temperature cut-out.
- ▶ Bath interior, frame with openings and parted perforated floor above the heating element are made of stainless steel.
- ▶ The openings in the frame have a diameter of 130 mm and are covered by sets of rings made of heatresistant plastic material.
- ▶ A support rod of 600 mm length and a diameter of 12 mm, made of stainless steel, is situated behind each opening. It serves to fix the steaming vessels securely.
- ▶ The adjustable water level regulator is on the left-hand side of the bath. It is included in the standard scope of supply of the units.
- ▶ Outer housing made of electrolytically galvanised sheet steel, powder-coated.

Applications

Chemical, clinical and biological laboratories, both in research and industry, decide on our Multiple Water Baths whenever special quality and quantity requirements are to be fulfilled.

1042 Multiple Water Bath



1041 Multiple Water Bath

Technical data

| Model Order No. | Openings with sets of rings | Ø of the openings mm | Working height [◆] mm | Exterior dimensions | | | Electrical connection* | Weight approx. | | Packing volume approx. m ³ |
|-----------------|-----------------------------|----------------------|--------------------------------|---------------------|----------|-----------|-----------------------------|----------------|----------|---------------------------------------|
| | | | | Width mm | Depth mm | Height mm | | net kg | gross kg | |
| 1041 | 4 | 131 | 90 | 682 | 232 | 190 | 230 V / 50...60 Hz / 1.0 kW | 12 | 15 | 0.12 |
| 1042 | 6 | 131 | 90 | 982 | 232 | 190 | 230 V / 50...60 Hz / 1.5 kW | 16 | 20 | 0.15 |

◆ perforated floor to upper rim

* Other voltages available on request

■ Preferential choice

Special bath Tissue Float Bath model 1052 reliably fulfills everyday tasks in laboratories. Its exact temperature regulation ensures evenly stretched cuttings which are clearly visible in the black anodised bath. The cuttings are carefully dried on the warmed rim of the bath, which is also black anodised.

Specifications and features

- ▶ Exact temperature constancy of $\pm 0.5^{\circ}\text{C}$.
- ▶ Temperature range from approx. 5°C above ambient to approx. $+80^{\circ}\text{C}$.
- ▶ The low 100 mm height of the bath allows comfortable and safe working.
- ▶ Bath interior made of aluminium, black anodised. Housing made of aluminium, powder-coated, with knob and scale of the temperature regulator, mains switch and two pilot lamps (green/yellow, for mains and heating).
- ▶ The control thermometer with stainless steel holder is fixed on the rim of the bath.

Accessory



Dust guard lid
made of aluminium,
black anodised

Order No. 1950

Applications

Histological, chemical, clinical and bacteriological laboratories use this special bath to stretch and dry cut tissues.



Technical data

| Model Order No. | Temperature range to | Interior dimensions Ø / H mm | Exterior dimensions Ø / H mm | Electrical connection* | Weight approx. net kg | Weight approx. gross kg | Packing volume approx m ³ |
|-----------------|---------------------------|------------------------------|------------------------------|-----------------------------|-----------------------|-------------------------|--------------------------------------|
| 1052 | ca. $+80^{\circ}\text{C}$ | 200 / 60 | 280 / 100 | 230 V / 50...60 Hz / 0.3 kW | 2 | 5 | 0.03 |

* Other voltages available on request



GFL Gesellschaft für Labortechnik mbH

P.O. Box 11 52 · 30927 Burgwedel / Germany
Schulze-Delitzsch-Strasse 4 · 30938 Burgwedel / Germany
Phone ++ 49 (0)5139 99 58 -0 · Fax ++ 49 (0)5139 99 58 21
E-Mail: info@GFL.de · Internet: www.GFL.de